

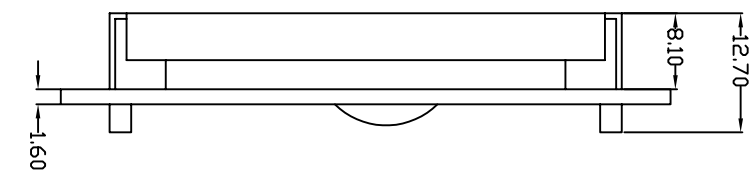


Customer approval :

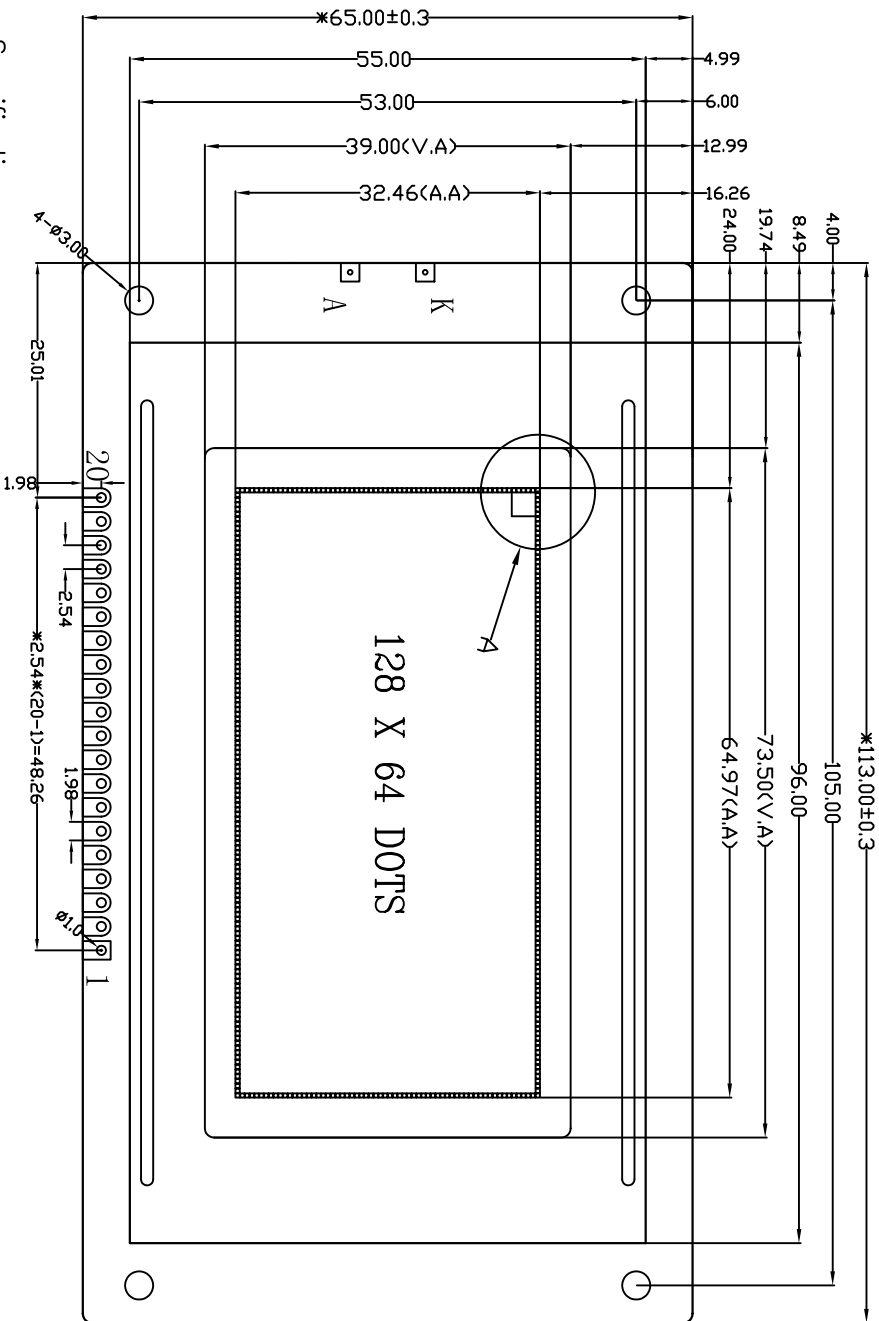

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, Vout:-4.9V,Vo:-4.2V,VDD:5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN,Y-G/REFLECTIVE/POSITIVE
- 4). Operating temp.: -10°C~60°C

Storage temp.: -20°C~70°C

- 5). Controller IC: S6B0107
- 6). Backlight: Bottom ,YG
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	CS1	CS2	VSS	VDD	VO	RS	RW	E	DB0	DB1
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	/RST	VEE	BLA	BLK



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

REV	REVISION RECORD	DATE
A0	First Issue	12/21

MODEL NO. SYB12864AV30

APPROVED BY CHECKED BY DRAWING BY

GENERAL TOL: ±0.3
PAGE: 1 OF 1
PROJECTION 三角法
UNIT: mm