


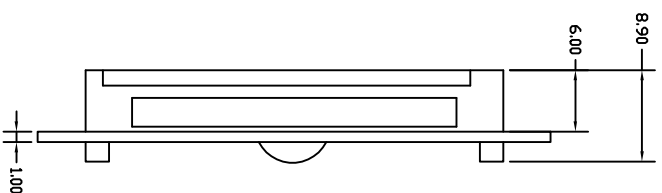


Customer approval :

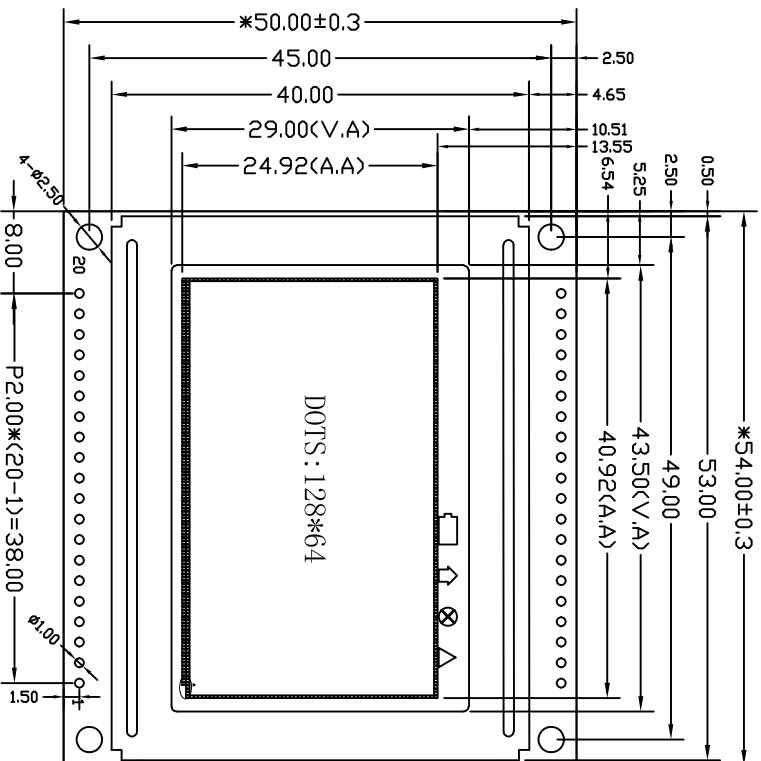

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	GND	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CS1	CS2	RST	VOUT	BLA	BLK

- Specification:
- 1). Driving: Dots:128\*64, Duty:1/64, Bias:1/9, VDD:5V, VOUT:~4.9V, VO:~4.2V
  - 2). Viewing Direction: 6 O'clock
  - 3). Display mode:STN/Blue/Negative/Transmissive
  - 4). Operating temp.: 0°C~+50°C  
Storage temp.: -10°C~+60°C
  - 5). Controller IC: KS0107
  - 6). Backlight: Bottom, White
  - 7). Dimensions with mark "" are important, with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	 <b>深圳市三元晶科技有限公司</b> ShenZhen TCCLCD HI-Tech Co., Ltd.		GENERAL TOL: ±0.3
A	FIRST ISSUE	2010/11/06	MODEL NO.	SYB12864V20-5C98L17R-85NG	
B			模组型号		
C			APPROVED BY	检查	
D			审核	Francis	
			Liu	2010/11/06	
			DRAWING BY	绘图	
			Luoxian	2010/11/06	
			PAGE:	1 OF 1	
			PROJECTION	三角法	
			UNIT:	单位:mm	