


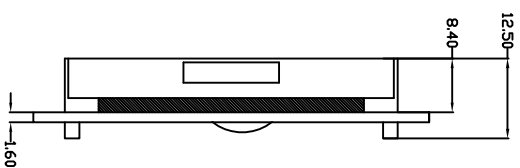


Customer approval :

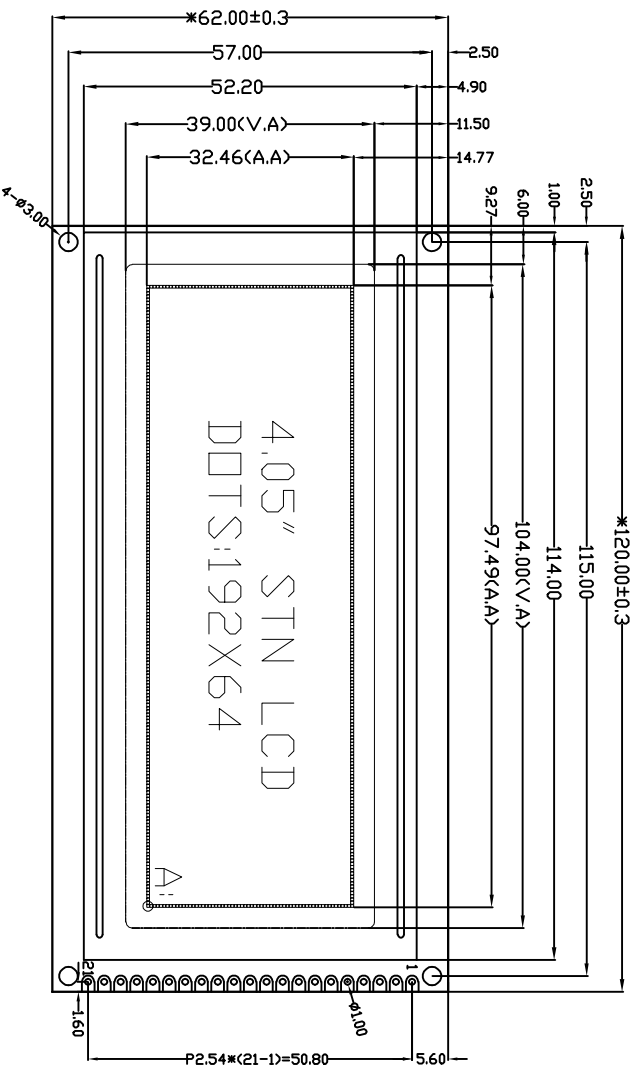

**SPECIFICATION:**

- 1). Driving: DOTS:192\*64, DUTY:1/32, BIAS:1/5, VDD:5.0V, VOUT:-4.9V, V0:-4.2V
- 2). Viewing angle: 6 O'CLOCK
- 3). Display mode: STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
- 4). Operating temp: -20° C~+65° C  
Storage temp: -30° C~+70° C
- 5). Controller IC: KS0107
- 6). Backlight: White
- 7). Dimensions with mark "\*" are important,  
with mark "(" )" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
CONNECTION	VSS	VDD	V0	VOUT	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	CS1	CS2	CS3	RES	BIA	BLK

REV	REVISION RECORD	DATE
A		
B		
C		
D		



深圳市三元晶科技有限公司  
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. SYB19264BV10 GENERAL TOL: ± 0.3

APPROVED BY CHECKED BY DRAWING BY Lgn PAGE: 1 OF 1 UNIT: mm

2013/03/14 PROJECTION

