


Customer approval :

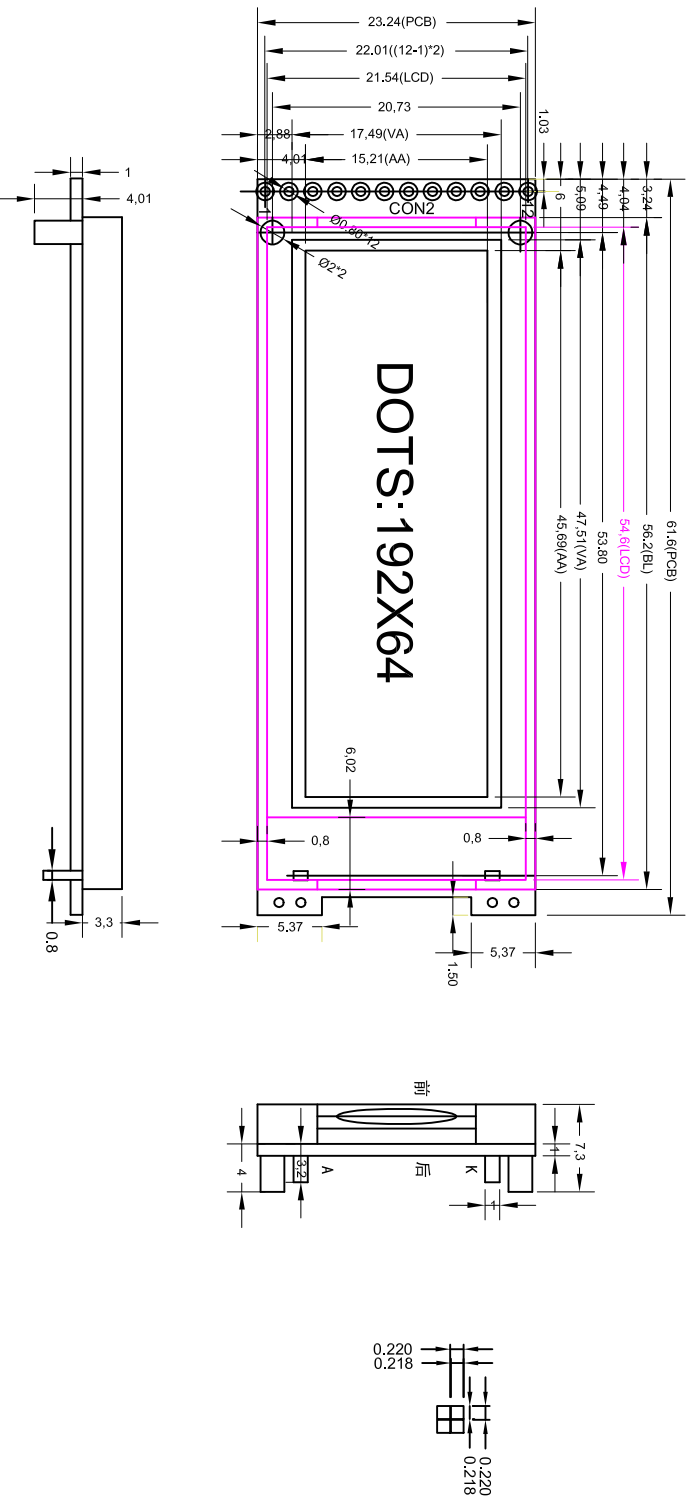

SPECIFICATION:

- 1). Driving: DUTY:1/64, BIAS:1/9, VDD:3.3V
- 2). Viewing angle: 6 O'CLOCK
- 3). Display mode: GRAY/POSITIVE/TRANSFLECTIVE
- 4). Operating temp: -20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Controller IC: UC1604 (or compatible)
- 7). Backlight: Edge(White), VLED=3.0V
- 8). Dimensions with mark "()" are important, with mark "*" () are referenced
- 9). All the raw materials are RoHS complicant

REV	REVISION RECORD	DATE
A	FIRST ISSUE	2019/09/03
B		
C		
D		

CON2

REV	REVISION RECORD	DATE
A	FIRST ISSUE	2019/09/03
B		
C		
D		



深圳市三元晶科技有限公司
Shenzhen TCC LCD HI-Tech Co., Ltd.

MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
模组型号	检查	绘图	未注公差 ±0.25
APPROVED BY	审核	LXX	PAGE: 1 OF 1
Liu	LGJ	2019/09/03	UNIT: 单位:mm
			PROJECTION 三角法